

AC-SCM1-BT



Local connection box

The connection box AC-SCM1-BT is an accessory for device of the series *COMPACTplus*. Sensors, buttons and display elements can be connected here by a M12 cable. These signals are transferred via a 0,5 m long common cable with angled M12 plug to the local socket of the *COMPACTplus* receiver or transceiver. The cable has to be mounted cross circuit safe. Except the green LED to display 24 VDC power supply, AC-SCM1-BT does not contain any electrical or electronic components and has thus no safety classification. The fixing of AC-SCM1-BT can be done


- on the side nuts of *COMPACTplus* or the rear nut of DC/UDC device columns by the centered drill holes with screw and sliding nut
- at the inner back side nuts of DC/UDC device columns by diagonal fixing with 2 screws going through the sheet metal from the rear side. Thereto remove the top cover of the column and feed the heads of the screws in the nuts.

Features


- Supply and signal voltage + 24 V DC
- Connection in M12 technology
- Simple connection to the *COMPACTplus* receiver or transceiver for example:
 - Muting sensors without testing
 - Muting indicator lamps, optionally several
 - Start button
 - 1- or 2-channel safety circuit

Leuze electronic GmbH + Co. KG
 Liebigstrasse 4
 82256 Fuerstenfeldbruck / Germany
 Phone +49 8141 5350-0
 Telefax +49 8141 5350-190
 info@leuze.de
 www.leuze.com

Dimensional drawing

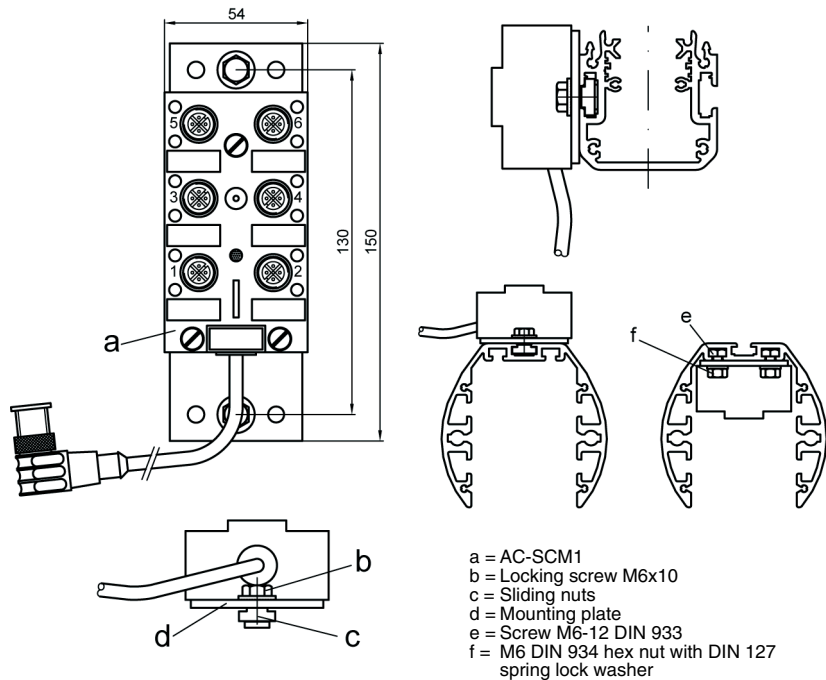

Internal wiring

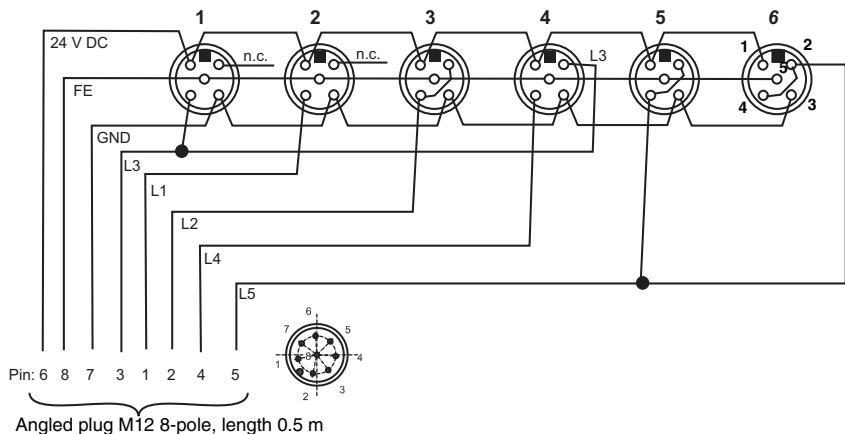

Technical data

power supply	+ 24 V DC ±20%
max. current	1 A
connection	6 sockets M12, 5-pole; 1 plug M12, 8-pole
isolation resistance	>10 ⁹ Ohm
protection degree	IP67
environmental temperature	-30 °C .. + 90 °C
housing	PA 6 GF 30
cable	PUR halogen free, color gray
housing color	black

Notes on Ordering

Type	Description	Art. no.
AC-SCM1-BT	Local connection box with mounting plate and mounting accessories	520068
AC-SCM1	Local connection box with M 12-Connection, for connection to local connecting socket	520065